

Install in accordance with national and local electrical codes.
All installation works must be performed with specialized personnel.

ANALOG DIM

An analogue driver with in-built three-step dimming. On/off switch operation.


Analoges Netzteil mit eingebauter, dreistufiger Dimmbarkeit. Bedienung über On/Off-Schalter.

	Step 1	Step 2	Step 3
three-step analog dimming	Switch turn ON	Switch turn OFF ↓ Less than 2.5 seconds ↓ Switch turn ON	Switch turn OFF ↓ Less than 2.5 seconds ↓ Switch turn ON
percentage of rated current	100 %	40 %	10 %

ANALOG DIM , ON/OFF SWITCH

NOTE: If the OFF time is longer than 2.5 seconds, once switch on again, PLM-40 will provide 100 % of rated output current

Hinweis: Steht das Gerät länger als 2,5 Sekunden auf OFF, werden beim nächsten Einschalten 100% Ausgangsnennstrom ausgegeben.

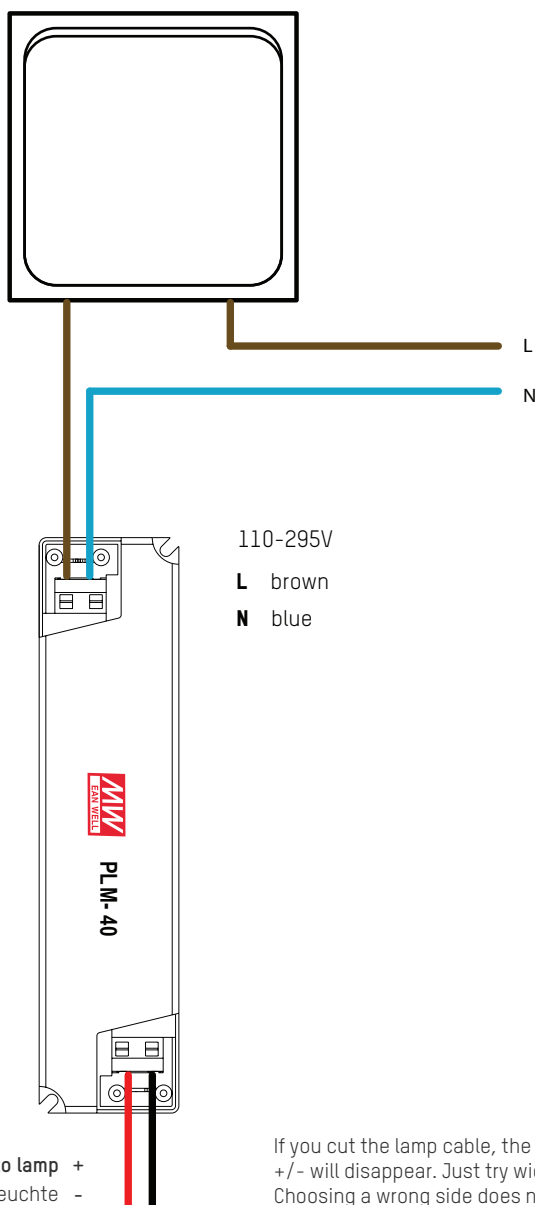

For more specific instruction see the driver data sheet.

Weitere Informationen finden Sie in der Bedienungsanleitung des Netzteils.

If you cut the lamp cable, the marking for +/- will disappear. Just try wich side works. Choosing a wrong side does not harm the light.