



Ballon



BALLON IS AN ALL-NEW, VERSATILE AND ADJUSTABLE FAMILY OF A NEW, CREATIVELY SHAPED ORGANIC DESIGN LANGUAGE, WITH TASTEFUL TOUCHES OF WOOD IN THE TUNTO FASHION.






Ballon wall 3

TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN



Frame and 110mm panel colors



250mm panel colors and materials



Wood Surface Finish: Lacquer

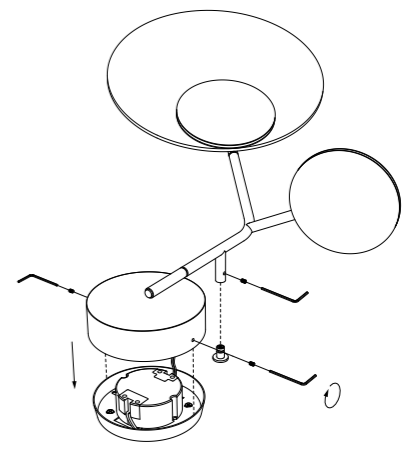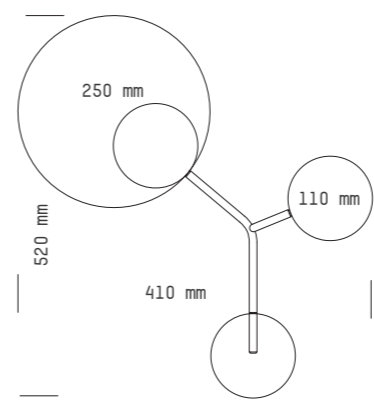

Adjustable panels: large 250 mm, small 110 mm

Drivers / Built-in


500 mA	non dimmable (standard)	LET
--------	-------------------------	-----

Drivers / External



500 mA	DALI, PUSH DIM	LCM25DA
	0-10V / PWM	LCM25
	CASAMBI DIM	CAS

Rated Power	6 W	Kelvin	2700 K, 3000 K (standard)
Voltage	220-240V 50/60 Hz, UL model 110-295V	Lumen	500 lm
Output	18 V 500 mA	CRI	85 Typ
Cord Length	External driver cable length, Standard 3 m,	Package Size	500 x 500x 150 mm
Frame color	Black RAL 9005 fine efekt, White RAL 9003 fine efekt	Package Weight	1,3-2 kg


INDOOR USE ONLY      NON-USER REPLACEABLE LIGHT SOURCE      IP20

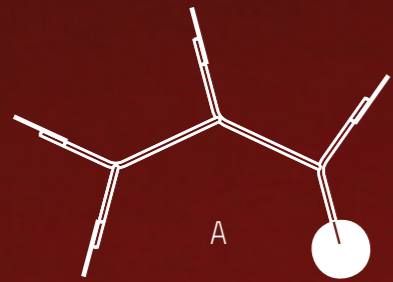

BALLON IS AN ALL-NEW, VERSATILE AND ADJUSTABLE FAMILY OF A NEW, CREATIVELY SHAPED ORGANIC DESIGN LANGUAGE, WITH TASTEFUL TOUCHES OF WOOD IN THE TUNTO FASHION.

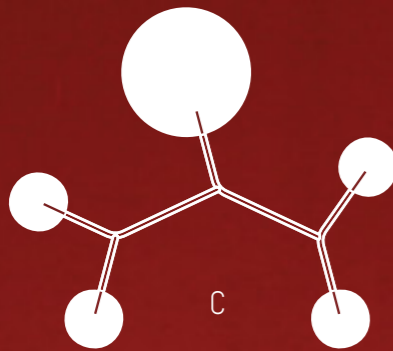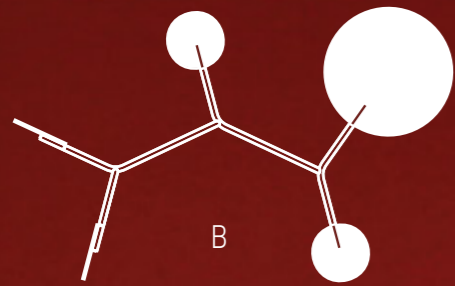

Ballon wall 5

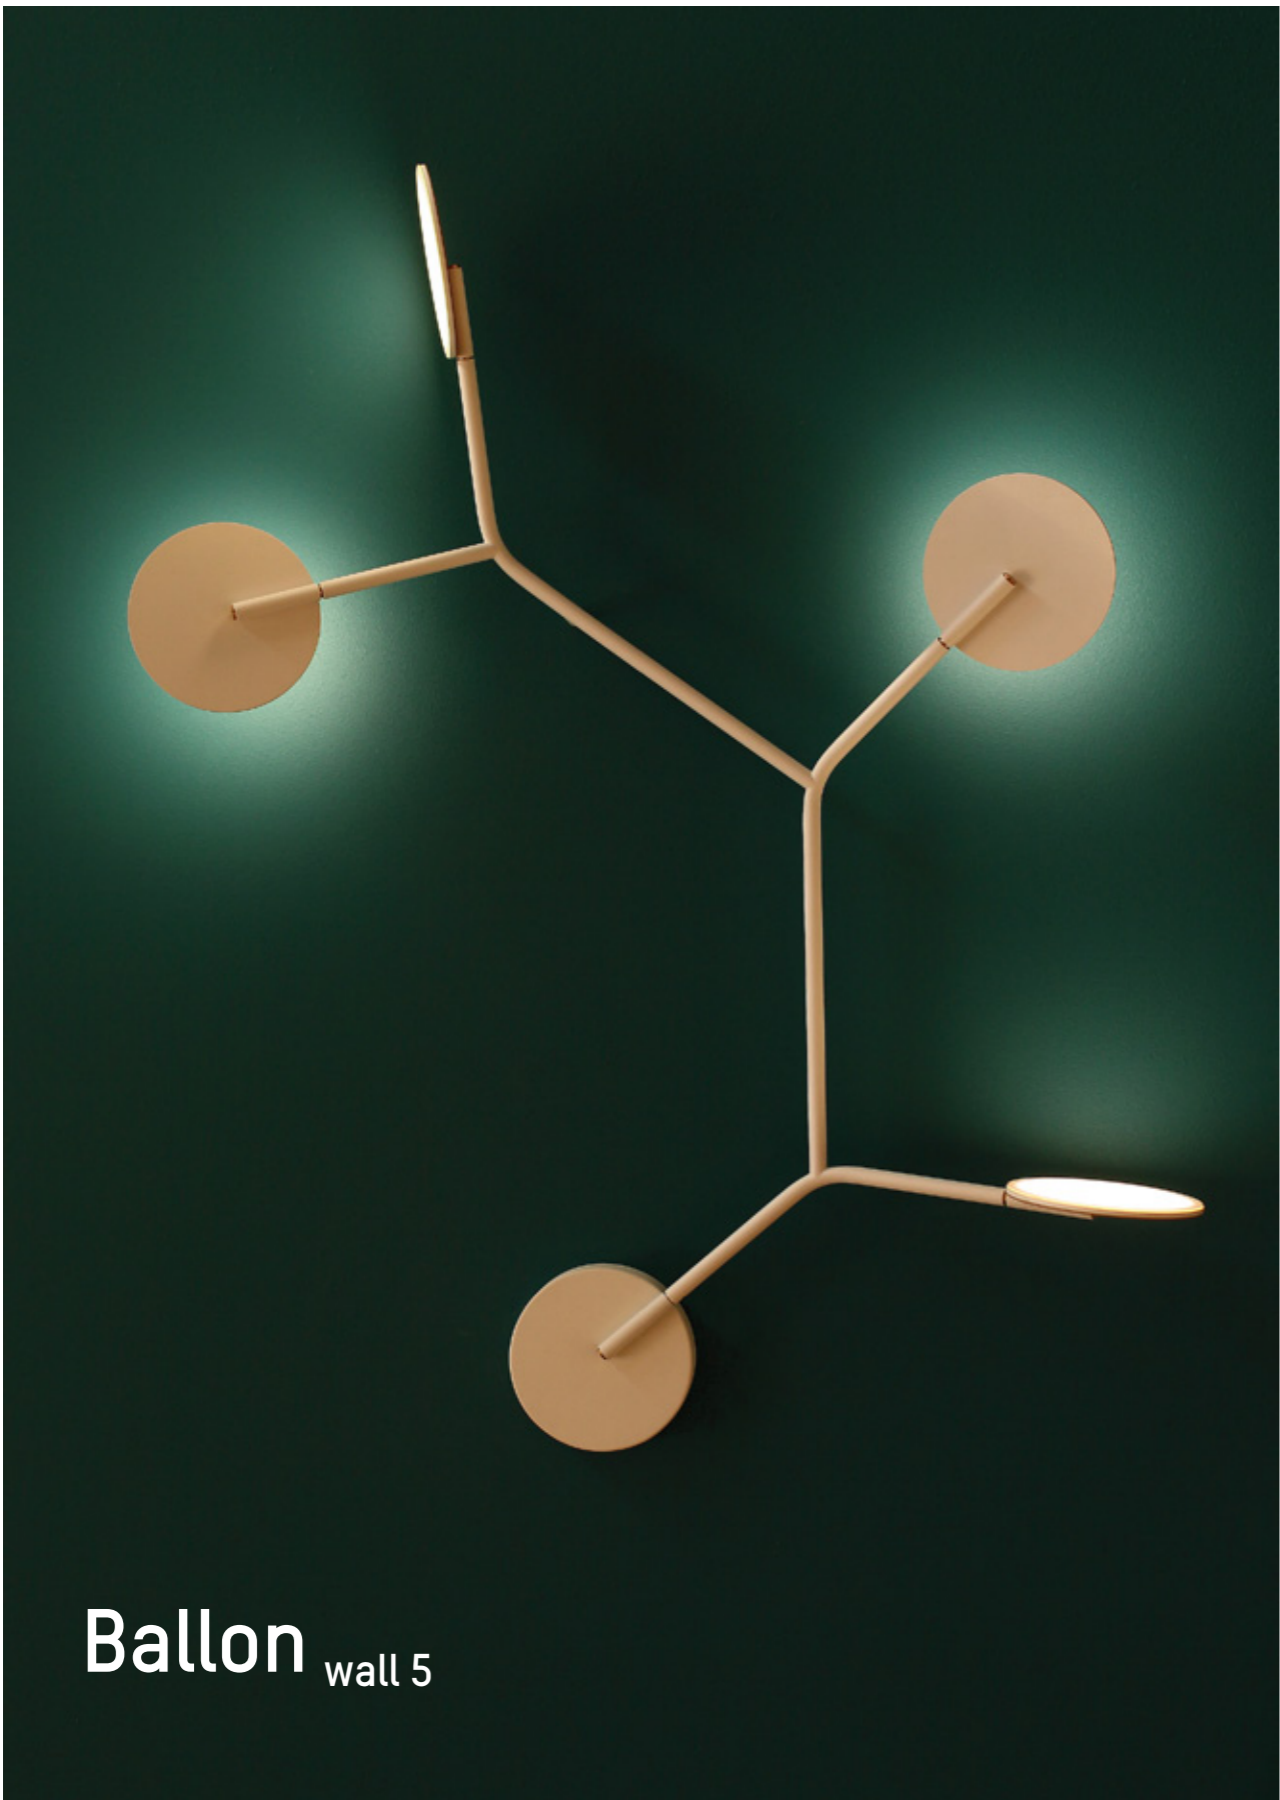


# Ballon wall 5

## TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN


Frame and 110 mm panel colors



250 mm panel colors and materials



Wood Surface Finish: Lacquer

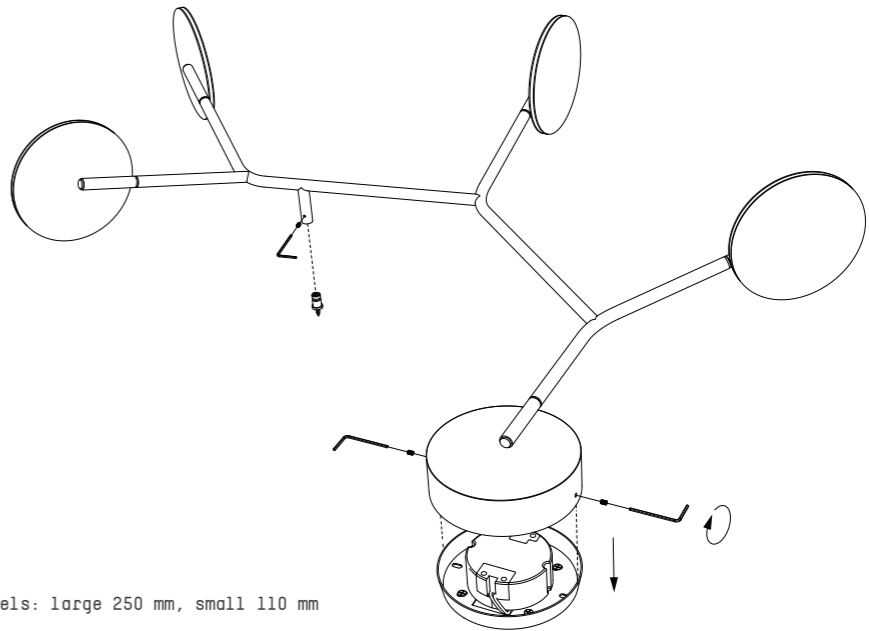

Adjustable panels: large 250 mm, small 110 mm

Drivers / Built-in

500 mA	non dimmable (standard)	LET
--------	-------------------------	-----

Drivers / External

500 mA	DALI, PUSH DIM	LCM25DA
	0-10V / PWM	LCM25
	CASAMBI DIM	CAS

Rated Power	6 W	Kelvin	2700 K, <u>3000 K (standard)</u>
Voltage	220-240V 50/60 Hz, UL model 110-295V	Lumen	1000 lm
Output	36 V 500 mA	CRI	85 Typ
Cord Length	External driver cable length, Standard 3 m,	Package Size	500 x 500x 150 mm
Frame color	Black RAL 9005 fine efekt, White RAL 9003 fine efekt	Package Weight	1,3-2 kg

INDOOR USE ONLY      NON-USER REPLACEABLE LIGHT SOURCE      IP20