









Led₆₀

LED₆₀ FIX

700 mm	31 W		Built-in / non-dimmable
700 mm	31 W		External *
400 mm	16 W		Built-in / non-dimmable
400 mm	16 W		External *

Direct  Indirect 

Drivers / Built-in

Non-dimmable	LT2040
--------------	--------

Drivers / External

DALI, PUSH DIM	(standard)	LCM40DA
CASAMBI DIM		CAS

Other Drivers / External

0-10V / PWM	LCM40
TRIAC *	PCD40
ANALOG DIM *	PLM40

The Led60 is ideal for efficient and sophisticated lighting needs of a small space. It is perfect for walls, ceilings or table areas.

The Led60 is twice as powerful as the Led40. The FIX model gives a forward or side-facing light, and can be easily and subtly attached to a wall or ceiling.

Die Led60 eignet sich ideal für das punktuelle und anspruchsvolle Beleuchten in kleinen Räumen sowohl als Wand-, und Decken- als auch als raffinierte Tischleuchte.

Die Led60 besitzt eine doppelt so hohe Leuchtkraft wie die Led40. Die Leuchte Led60 FIX ist als Modell mit frontal abstrahlendem (direktem) sowie mit seitlich abstrahlendem (indirektem) Licht erhältlich. Sie kann leicht und unauffällig an Wand oder Decke angebracht werden.



Led₆₀

Collection 2019

LED₆₀ PENDANT

2400 mm	2 X 55 W		Built-in / non-dimmable
2400 mm	2 X 55 W		External
2000 mm	2 X 45 W		Built-in / non-dimmable
2000 mm	2 X 45 W		External
1600 mm	70 W		Built-in / non-dimmable
1600 mm	70 W		External
1300 mm	55 W		Built-in / non-dimmable
1300 mm	55 W		External
1000 mm	43 W		Built-in / non-dimmable
1000 mm	43 W		External *
700 mm	30 W		Built-in / non-dimmable
700 mm	30 W		External *

Direct 60°

Drivers / Built-in

Non-dimmable	LT2040ELT
--------------	-----------

Drivers / External

DALI, PUSH DIM	(standard)	LCM40/60DA
CASAMBI DIM		CAS

Other Drivers / External


0-10V / PWM		LCM40/60
TRIAC	*	PCD40
ANALOG DIM	*	PLM40

When used in groups of two, Led60 lights fulfill the lighting needs of even the most demanding interior spaces.


In Kombination zweier Led60-Leuchten kann auch in anspruchsvollsten Räumen eine effiziente Lichtplanung verwirklicht werden.

TUNTO


FIX / External model

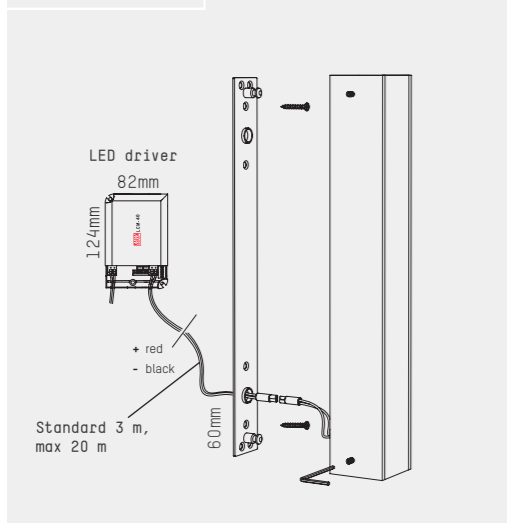


FIX / Built-in model

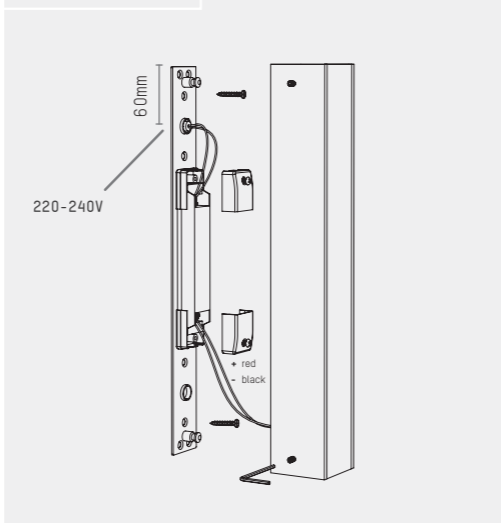

PENDANT / Power box model

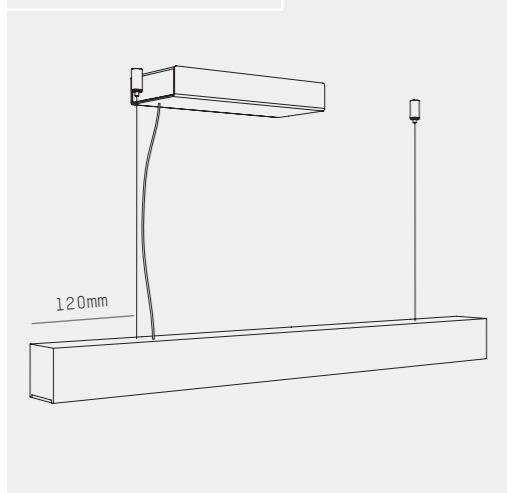


PENDANT / Built-in model

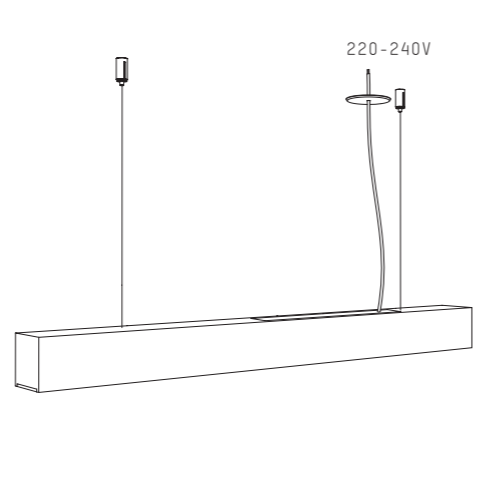


TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN

Available colors and materials

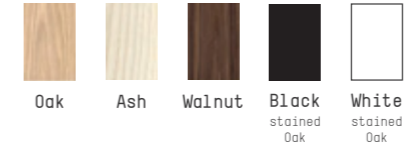


Surface Finish Ash: White Oil wax / Oak, Walnut: Oil wax

Led₆₀ 700 mm pendant lx

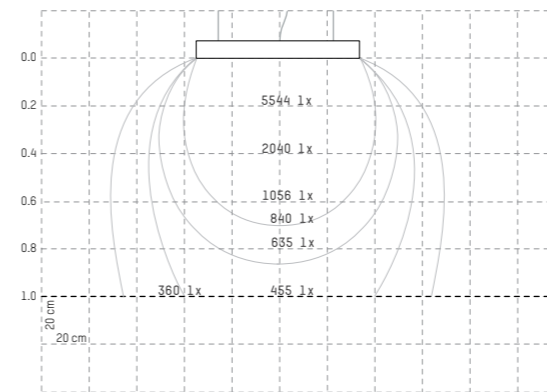

Led₆₀ 700 mm pendant lx / measured 1.0 m on the table

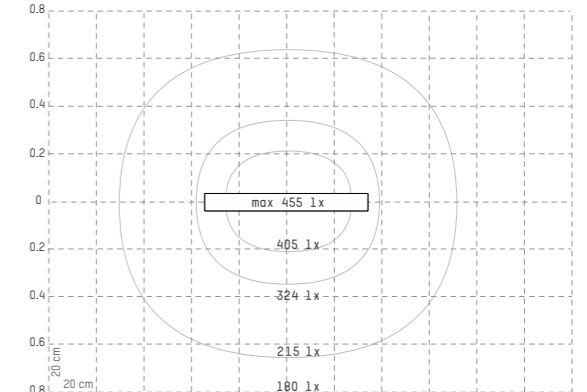

Drivers / Power Box

700 mA	DALI, PUSH DIM (standard)	LCM40DA
	CASAMBI DIM	CAS

Drivers / Built-in

700 mA	Non-dimmable	LT-2040
--------	--------------	---------

Other Drivers

700 mA	0-10V / PWM	LCM40
	TRIAC * [UL model]	PCD40
	ANALOG DIM *	PLM40

Rated Power	16-70W, 2x 45-55W	Kelvin	2700 K, 3000 K (standard), 4000 K
Voltage	180-295V 50/60 Hz, UL model 110-295V	Lumen	400mm / 1080 lm, 700mm / 2180 lm, 1000mm / 3240 lm, 1300 / 4380 lm, 1600mm / 5450 lm, 2000mm / 6550 lm, 2400mm / 8750 lm
Output	18-136V 700 mA	CRI	93
Cord Length	Pendant, standard 2 m, transparent. FIX, standard 3 m, Max 20 m.	Package Size	130 x 110 x 600-2450 mm
Power Box	White ceiling cup 220 x 100 x 35 mm RAL 9003 fine efekt	Package Weight	14,5 kg

INDOOR USE ONLY NON-USER REPLACEABLE LIGHT SOURCE IP20

Led₆₀