

ELEGANCE IN THE AIR


The Swan Wing Pendant complements the elegant Swan family with a graceful lining. The Wing provides a completely new way of combining the lights.

ELEGANZ IN DER LUFT

Die Swan Wing Pendelleuchte ergänzt die elegante Swan Familie mit zarter Linienführung. Die Leuchten können kreativ miteinander kombiniert werden.


Swan wing



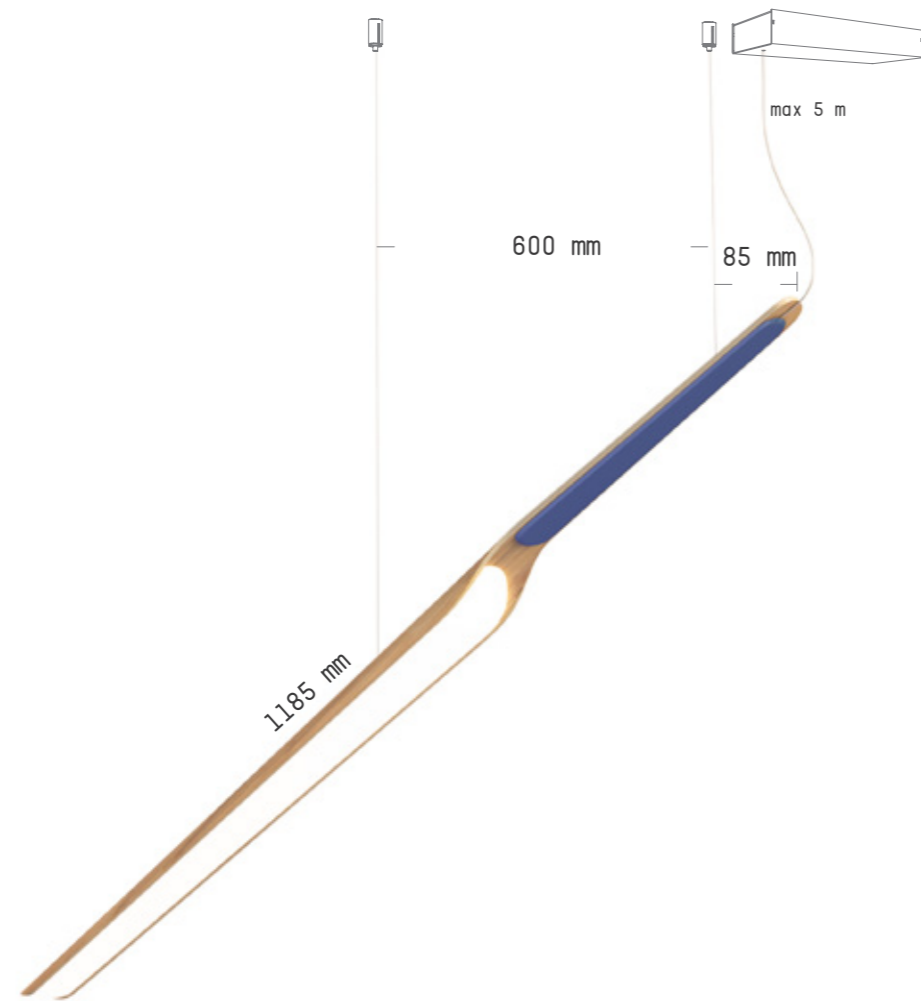


TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN

Available colors and materials

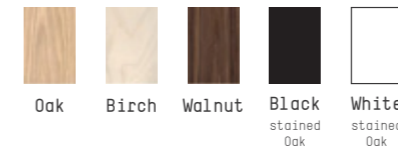


Surface Finish Lacquer

Cover plate colors and materials



Swan Pendant 500mA lx measured 1.0 m on the table

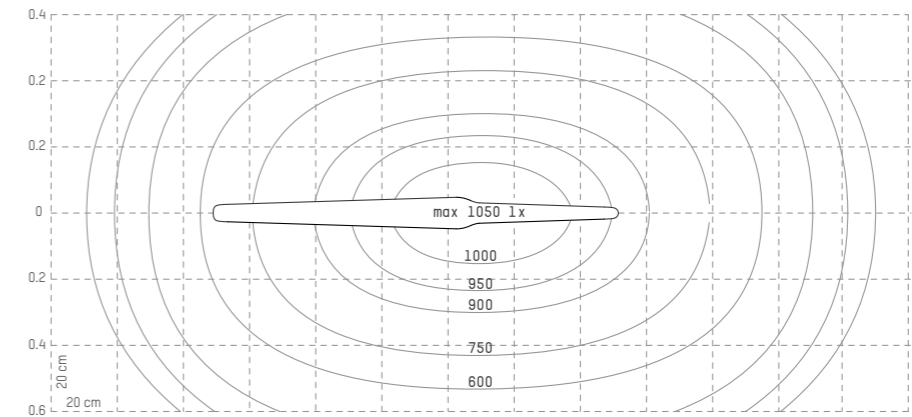

Drivers / Power Box

350 / 500 mA	DALI, PUSH DIM [standard]	LCM-40DA
	CASAMBI DIM	CAS
	0-10V / PWM	LCM-40

Drivers / Power Box

600 mA	DALI, PUSH DIM	LCM-60DA
	CASAMBI DIM	CAS
	0-10V / PWM	LCM-60

Other Drivers / External *

500 mA	TRIAC	PCD40
	ANALOG DIM [UL model]	PLM40

Rated Power	15-28 W	Kelvin	2700 K, 3000 K [standard],
Voltage	180-295V 50/60 Hz, UL model 110-295V	Lumen	350 mA, 15 W / 1400 lm
Output	350, 500, 600 mA		500 mA, 20 W / 1975 lm
			600 mA, 28 W / 2310 lm
Cord Length	Standard 2 m, on request max 5 m, transparent	CRI	85 Typ
Power Box	White ceiling cup 220x100x35mm or round cup 40x180mm. RAL 9003 fine efekt	Package Size	130 x 110 x 1230 mm
		Package Weight	4,5 kg

INDOOR USE ONLY

NON-USER REPLACEABLE LIGHT SOURCE

IP20

CE

